


CS134:

Classes & Objects

Accessor & Mutator Methods

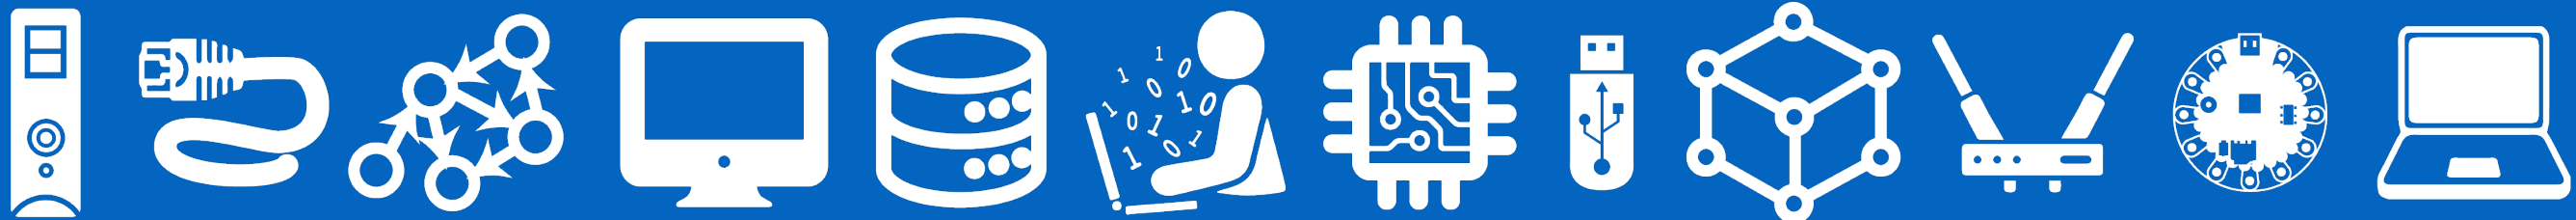

Announcements & Logistics

- **Lab 7 due** tonight/tomorrow at 10 pm
 - Make sure your **images and values** match the handout
- **HW 8** will be released today, due Monday at 10 pm
- Lab 8 is also a partner lab:
 - Fill out partner google form (from Lida) by **tomorrow @ noon**
 - Every student has to fill out the form (**both partners**)
 - **Must attend one lab session together**
 - Mon lab due on Wed, Tue lab due on Thur
- **Final Exam:** Wednesday, December 11 at 9:30am in Wachenheim B11

Do You Have Any Questions?

Last Time

- Introduced the big idea of **object oriented programming** (OOP)
- Everything in Python is an object and has a type!
 - We can create **classes** to define our own types
- Learned how to define and call **methods** on objects of a **class**
 - first parameter in methods is always **self** (is a reference to the object that the method is called on)
- Quick aside: **functions versus methods**?
 - Functions are not associated with a specific class
 - Methods are associated with a specific class and are invoked on instances of the class (using dot notation)


Today's Plan

- Implement a simple Book class and learn about the following:
 - Learning about scope and naming conventions in Python
 - Using the `__init__()` method to initialize objects with their attribute values
 - Defining **accessor** and **mutator** methods to interact with attributes
 - Implementing and invoking methods in general
 - Implementing `__str__()` method to provide meaningful print statements for custom objects



Defining Our Own Type: Book class

class Book



Class definition provides a “blueprint” for creating specific books and specify attributes of books



title	Fellowship of the Ring
author	J.R.R. Tolkien
year	1954



title	Pride and Prejudice
author	Jane Austen
year	1813



title	Parable of the Sower
author	Octavia Butler
year	1993

Providing values for attributes of the Book class, such as title, author, and year, define key features of individual instances

Specific instances of the Book class

Defining Our Own Class: Book

Name of class (always capitalized by convention)

```
class Book:  
    """This class represents a book"""  
    # indented body of class  
    definition
```

Creating instances of the class:

```
book1 = Book()
```

book1 is an instance of class Book

```
book2 = Book()
```

book2 is another (different) instance of class Book

Attributes

- Objects have *state* which is typically held in **instance variables** or (in Pythonic terms) **attributes**
 - For the **Book** class, let's define attributes as
 - **`_title`, `_author`, `_year`**
 - the leading underscore in the variable name indicates that they are ***protected*** (these are not meant to be used outside the class body)
- Every **Book** instance has different attribute *values*!
- In Python, we typically **declare** and **initialize** attributes in a special function known as the **constructor**
- The constructor has a special name: **`__init__`** and is typically defined at the top of the class before all other method definitions

Constructing objects with `__init__`

- Currently the constructor just initializes the attributes to some default values
- Ideally, the constructor should take inputs just like any other function in order to initialize the attributes to the desired values

```
class Book:
    """This class represents a book"""

    def __init__(self):
        self.author = ""
        self.title = ""
        self.year = 0
```

author, title,
and year are
attributes of
the Book
class

Constructor: Defining `__init__`

```
class Book:
    """This class represents a book"""
    # attributes: author, title, year
    def __init__(self, book_author, book_title, book_year):
        self._author = book_author
        self._title = book_title
        self._year = book_year
```

Implicitly calls
`__init__(book1, "Alcott",
"Little Women", 1869)`

Creating instances of the class:

```
book1 = Book("Alcott", "Little Women", 1869)
```




```
book2 = Book("Tolkein", "Lord of the Rings", 1954)
```

Constructing objects with `__init__`

- The constructor now takes inputs, but the print function doesn't allow us to comprehend the contents of this object
- To get something more meaningful we need to define a string representation for our object

```
class Book:
    """represents a book"""
    def __init__(self, book_author, book_title, book_year):
        self._author = book_author
        self._title = book_title
        self._year = book_year
```

Class Methods



Methods and Data Abstraction

- Ideally, we should not allow direct access to the object's attributes:

```
>>> # creating book objects
>>> ps = Book("Parable of the Sower", "Octavia Butler", 1993)
>>> ps._title
'Parable of the Sower'
```

- Instead we control access to attributes through accessor and mutator methods and avoid accessing the attributes directly
 - **Accessor methods:** provide “read-only” access to the object's attributes (“**getter**” methods)
 - **Mutator methods:** let us modify the object's attribute values (“**setter**” methods)
- This is called **encapsulation**: the bundling of data with the methods that operate on that data (another OOP principle)

```
class Book:
    """This class represents a book with attributes title, author, and year"""

    # __init__ is automatically called when we create new Book objects
    # we set the initial values of our attributes in __init__
    def __init__(self, book_title, book_author, book_year):
        self._title = book_title
        self._author = book_author
        self._year = book_year

    # accessor (getter) methods
    def get_title(self):
        return self._title

    def get_author(self):
        return self._author

    def get_year(self):
        return self._year

    # mutator (setter) methods
    def set_title(self, book_title):
        self._title = book_title

    def set_author(self, book_author):
        self._author = book_author

    def set_year(self, book_year):
        self._year = int(book_year)
```

Accessor methods return values of attributes, but do not change them

```
class Book:
    """This class represents a book with attributes title, author, and year"""

    # __init__ is automatically called when we create new Book objects
    # we set the initial values of our attributes in __init__
    def __init__(self, book_title, book_author, book_year):
        self._title = book_title
        self._author = book_author
        self._year = book_year

    # accessor (getter) methods
    def get_title(self):
        return self._title

    def get_author(self):
        return self._author

    def get_year(self):
        return self._year

    # mutator (setter) methods
    def set_title(self, book_title):
        self._title = book_title

    def set_author(self, book_author):
        self._author = book_author

    def set_year(self, book_year):
        self._year = int(book_year)
```

Mutator methods change the value of attributes but do not explicitly return anything


Using Accessor/Mutator Methods

```
>>> pp.get_title()  
'Pride and Prejudice'  
>>> emma.get_author()  
'Jane Austen'  
>>> ps.get_year()  
1993  
>>> ps.set_year(1991)  
>>> ps.get_year()  
1991
```

Use accessor methods to get the values of the attributes (when outside of class implementation)

Use mutator methods to set or change the values of the attributes (when outside of class implementation)

Aside: Naming Conventions in Python

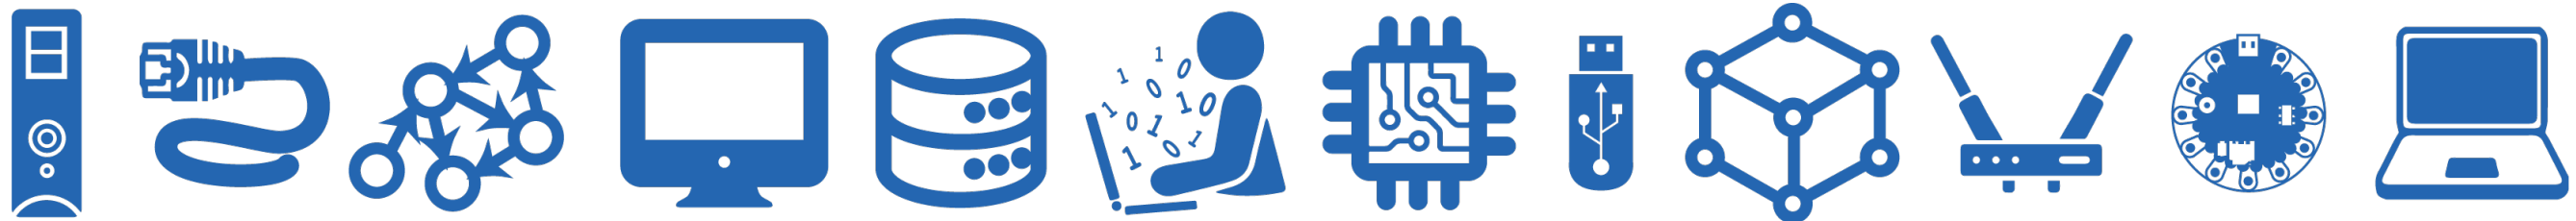

Scope & Naming Conventions in Python

- Double leading underscore (__) in name (**strictly private**): e.g. __value
 - “Invisible” from outside of the class
 - Strong **“you cannot touch this”** policy (which is enforced)
- Single leading underscore (_) in name (**private/protected**): e.g. _value
 - Can be accessed from outside, but really shouldn't
 - **“Don't touch this (unless you are a subclass)”** policy
 - **Most attributes in CS134 should start with a single underscore**
- No leading underscore (**public**): e.g. value
 - Can be freely used outside class
- These conventions apply to **methods names** and **attributes**

Attribute Naming Conventions

```
class TestingAttributes():  
  
    def __init__(self):  
        self.__val = "I am strictly private."  
        self._val = "I am private but accessible from outside."  
        self.val = "I am public."
```

```
>>> a = TestingAttributes()
```

```
>>> a.__val
```

```
AttributeError: 'TestingAttributes' object has no attribute '__val'
```

```
>>> a._val
```



```
'I am private but accessible from outside.'
```

```
>>> a.val
```

```
'I am public.'
```

Note: Although we can access attributes directly using dot notation, it's bad practice: should always use methods to access/manipulate attributes

Class Methods: More!



Defining More Methods

- Beyond the accessor and mutator methods, we can define other methods in the class definition of **Book** to manipulate or answer questions about our book objects:
 - **num_words_in_title()**: returns the number of words in the title of the book
 - **years_since_pub(current_year)**: takes in the current year and returns the number of years since the book was published
 - **same_author_as(other_book)**: takes another Book object as a parameter and checks if the two books have the same author

num_words_in_title()

- Returns the number of words in the title of the book

```
class Book:
    ...

    # methods for manipulating Books
    def num_words_in_title(self):
        """Returns the number of words in title of book"""
        return len(self._title.split())
```

years_since_pub(current_year)

- Takes in the current year and returns the number of years since the book was published

```
class Book:
    ...

    def years_since_pub(self, current_year):
        """Returns the number of years since book was published"""
        return current_year - self._year
```

same_author_as(other_book)

- Takes another Book object as a parameter and checks if the two books have the same author

```
class Book:
    ...

    def same_author_as(self, other_book):
        """Check if self and other_book have same author"""
        return self._author == other_book.get_author()
```

```
class Book:
    """This class represents a book with attributes title, author, and year"""

    # __init__ is automatically called when we create new Book objects
    # we set the initial values of our attributes in __init__
    def __init__(self, book_title, book_author, book_year):
        self._title = book_title
        self._author = book_author
        self._year = int(book_year)

    # accessor (getter) methods
    def get_title(self):
        return self._title

    def get_author(self):
        return self._author

    def get_year(self):
        return self._year

    # mutator (setter) methods
    def set_title(self, book_title):
        self._title = book_title

    def set_author(self, book_author):
        self._author = book_author

    def set_year(self, book_year):
        self._year = int(book_year)

    # methods for returning book properties
    def num_words_in_title(self):
        """Returns the number of words in title of book"""
        return len(self._title.split())

    def years_since_pub(self, current_year):
        """Returns the number of years since book was published"""
        return current_year - self._year

    def same_author_as(self, other_book):
        """Check if self and other_book have same author"""
        return self._author == other_book.get_author()
```


Invoking Class Methods

- We invoke methods on specific instances of our class
- In this example, we are invoking Book methods on specific Book objects

```
>>> # creating book objects
```

```
>>> pp = Book("Pride and Prejudice", "Jane Austen", 1813)
```

```
>>> emma = Book("Emma", "Jane Austen", 1815)
```

```
>>> ps = Book("Parable of the Sower", "Octavia Butler", 1993)
```

```
>>> ps.num_words_in_title()
```

```
4
```

```
>>> emma.years_since_pub(2023)
```

```
208
```

```
>>> ps.years_since_pub(2023)
```

```
30
```



```
>>> ps.same_author_as(emma)
```

```
False
```

```
>>> emma.same_author_as(pp)
```

```
True
```

__str__ : special method called by
print



Print Representation of an Object

```
class Book():  
    def __init__(self, title):  
        self._title = title
```

```
>>> test = Book("testing")
```

```
>>> print(test)
```

```
<__main__.Book object at 0x105eecca0>
```

By default, if we print an object, the output is not helpful

- Special method `__str__` is automatically called when we ask to print a class object in Python
- `__str__` must always return a string
- We can customize how the object is printed by writing a custom `__str__` method for our class
- Very useful for debugging!

`__str__` for Book class

- What is a useful string representation of a **Book**?
- Something that combines the attributes in a meaningful way



```
# __str__ is used to generate a meaningful string representation for Book objects  
# __str__ is automatically called when we ask to print() a Book object  
def __str__(self):  
    return ""+self._title+"", by "+self._author+", in "+ str(self._year)
```

- Now when we ask to print a specific instance of a **Book**, we get something useful

```
>>> print(emma)
```

```
'Emma', by Jane Austen, in 1815
```

Other Special Methods



Other Special Methods

- There are many other “special” methods in Python.

• <code>__eq__ (self, other):</code>	<code>x == y</code>
• <code>__ne__ (self, other):</code>	<code>x != y</code>
• <code>__lt__ (self, other):</code>	<code>x < y</code>
• <code>__gt__ (self, other):</code>	<code>x > y</code>
• <code>__add__(self, other) :</code>	<code>x + y</code>
• <code>__sub__(self, other):</code>	<code>x - y</code>
• <code>__mul__(self, other):</code>	<code>x * y</code>
• <code>__truediv__(self, other):</code>	<code>x / y</code>
• <code>__pow__(self, other):</code>	<code>x ** y</code>

- There are others, and we can reimplement any of these for our class!

Summary

- Today we built a simple **Book** class
- (Briefly) Learned about about scope and naming conventions in Python
- Used the `__init__()` method to initialize Book objects with their attribute values
- Defined **accessor** and **mutator** methods to interact with attributes and avoid accessing attributes directly
 - Note about mutators: If an attribute should not change, no need to define a setter method for it!
- Implemented a few more “interesting” Book methods
- Implemented the `__str__()` method so that we get meaningful print statements for our Book objects

The end!

